

Your Best Choice in Small Line Grout and Concrete Pumps





The Western W30 Super Duty was designed tough and held to the highest standards of quality. It comes with all the best features at no extra cost making it the most productive and cost effective pump in it's class.

Rugged steel Large splash engine cover with quard ventilation door Central lubrication system and water box Six cubic foot hopper for ease of maintenance with grate Built in hour meter 2" ball or pin hitch Wedge style Gasoline or manifold locking Diesel engines system (no tools available required for disassembly) Automatic safety switch In-frame Super duty frame 18 gallon with torsion bar fuel tank suspension



The W30SD pumps 1/2 inch (-12mm) minus aggregate up to 25 yards per hour and was engineered with the contractor in mind. All it's components are of made of the highest quality materials and engineering designed to last while providing you consistent results.

It is equipped with powerful dependable engines (Diesel or Gasoline) and a heavy duty centrifugal clutch. It also uses the hinged manifold locking system, a centralized lubrication system and piston lubricating box which allows smoother pumping, easier clean-up, faster set-up and higher dependability.




Heavier duty heat-treated billet steel crankshaft

- Masonry grouting
- **Decks & Patios**
- Shotcrete
- Columns
- **Footings**
- **Swimming pools**
- Slope stabilization
 - Lining (Ditch. Reservoir, Channel)
- Vault construction
- **Foundations**
- Slabs & Basements
- **Piling**
- Grout
- Slurries
- Slab jacking

...Much more!




WESTERN

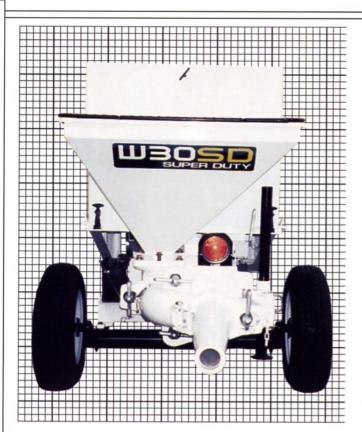

SPECIFICATIONS

Pump Design	Reciprocating Piston
Valve	Ball & Seat
Maximum Aggregate Siz	e1/2 inch Minus (12mm)
Pumping Rate*	25cu. yds. Per Hour
Horizontal Pumping Dist	ance* 400 feet (125 m)
Vertical Pumping Height	*100 feet (30 m)
Outlet Size	
Cylinder Diameter	6 inches (153 mm)
Cylinder Length	12 inches (305 mm)
Gas Engine	Wisconsin VH4D 30hp
Diesel Engine	Hatz 2M41Z 37hp
Fuel Capacity	18 gallons (68 liters)
Hopper Height	50 inches (1.27 m)
Hopper Capacity	6 cubic Feet (170 liters)
Length	145 inches (3.68 m)
Width	60 inches (1.52 m)
Height	63 inches (1 m)
Weight**	
Tire	14 inches
Remote Control	250 feet of cable

The wedge style manifold locking system with fixed stop pins swings open and doesn't require any special tools for disassembly. This allows you to service, clean and maintain it with a minimum down time helping you reach maximum productivity.



^{**} Varies depending on options selected.

All specifications and features are subject to change without notice.

Your Western dealer is:

NORTHWEST EQUIPMENT 2011 SO 341ST PLACE FEDERAL WAY WA 98003

1-800-717-1338



FONTANA, CA PHONE (909) 350-3366 FAX (909) 350-3342 www.westernmanufacturing.net

